(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 852 520 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
04.08.1999 Bulletin 1999/31

(21) Application number: **96933860.7**

(22) Date of filing: **20.09.1996**

(51) Int. Cl.[6]: **B07C 3/14**, B07C 3/00

(86) International application number:
PCT/US96/15218

(87) International publication number:
WO 97/11790 (03.04.1997 Gazette 1997/15)

(54) **SYSTEM AND METHOD FOR READING PACKAGE INFORMATION**
SYSTEM UND VERFAHREN ZUM LESEN VON PAKETINFORMATION
SYSTEME ET PROCEDE DE LECTURE D'INFORMATIONS SUR DES COLIS

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

(30) Priority: **29.09.1995 US 536865**

(43) Date of publication of application:
15.07.1998 Bulletin 1998/29

(73) Proprietor:
UNITED PARCEL SERVICE OF AMERICA, INC.
Atlanta, GA 30328 (US)

(72) Inventors:
- **BJORNER, Johannes, A., S.**
Woodbury, CT 06798 (US)
- **MOED, Michael, C.**
Roswell, GA 30075 (US)

(74) Representative:
Pratt, David Martin et al
Withers & Rogers,
Goldings House,
2 Hays Lane
London SE1 2HW (GB)

(56) References cited:
EP-A- 0 647 479
DE-A- 3 942 932
US-A- 4 776 464
US-A- 4 832 204
US-A- 4 921 107

EP 0 852 520 B1

Printed by Xerox (UK) Business Services
2.16.7/3.6

Description

Technical Field

[0001] The present invention relates to package tracking systems, and more particularly relates to systems for automatically reading and decoding package information such as machine readable codes and alphanumeric destination information.

Background of the Invention

[0002] Small package delivery companies such as the assignee of the present invention may handle as many as several million packages each day. In order to improve the efficiency and accuracy with which this volume of packages is handled, these companies increasingly rely on automated package sorting and routing facilities. Small package delivery companies also desire to obtain package related information in order to better manage their operations and to provide a variety of shipping related information to their customers.

[0003] The process of sorting and tracking packages as they proceed through a package transportation system requires that each package bear two types of information. First, each package must provide a destination address. Second, each package must include a tracking number that uniquely identifies it from other packages in the system.

[0004] The destination address is required in order for the package delivery company to know where the package is going. The destination address, which includes alphanumeric text, is typically written on the package or printed on a label that is affixed to the package. For addresses in the United States, the destination address includes a street address, city, state and zip code.

[0005] The tracking number, which consists of a series of alphanumeric characters, uniquely identifies each package in the package transportation system. In most cases, the tracking number is affixed to the package in the form of a machine readable code or symbol such as a bar code. The machine readable code is read by electronic code readers at various points in the transportation system. This allows the package delivery company to monitor the movement of each package through its system and to provide customers with information pertaining to the status and location of each package.

[0006] The importance of collecting package related data has led to the development of a variety of devices for reading bar codes and other machine readable codes. These devices include hand held readers used by employees when they pick up or deliver packages, and over-the-belt cameras that are mounted over conveyor belts in order to read machine readable codes as the packages move through the delivery company's terminal facilities.

[0007] U.S. Patent No. 4,832,204 describes a package handling and sorting system in which an operator uses a bar code scanner to scan the bar coded package identification number. The operator also weighs the package and reads the destination address, and keys this data into a terminal, where it is stored along with the identification data. In subsequent sorting operations, the bar code scanners scan the bar code and use the identification data to access the database and determine the destination of the package. U.S. Patent No. 4,776,464 describes an article handling system that uses a camera to capture an image of package labels.

[0008] In some cases, shippers may also print and affix labels including two-dimensional machine readable codes that include both package identification information and destination address information. These dense codes are read by over-the-belt cameras and the information is used to track and sort the package. However, for packages that enter the delivery company's system without such labels, there is no efficient, automatic way to prepare such labels and affix them to packages.

[0009] Optical character recognition (OCR) technology has also improved to the point where it is feasible to automatically read and decode printed destination address data. The assignee of the present invention has developed over-the-belt camera systems that can be used to capture and decode bar codes and text as packages travel beneath the camera on a conveyor belt. The ability to read and decode destination address data is useful because it facilitates automatic sorting and routing of packages in the delivery system.

[0010] Although OCR systems are becoming more common, there are often difficulties associated with decoding data from packages moving on a conveyor belt at a high rate of speed. Current bar code decoding techniques provide for using a variety of algorithms for scanning an image and locating and decoding a bar code. These techniques are very accurate, in part because of the use of checksums and other techniques to ensure the reliability of the bar code decoding process. OCR techniques typically apply a variety of decode algorithms to a string of text in order to accurately decode the text. However, there remains the possibility that the address data may be improperly decoded. Furthermore, it is difficult to detect an improperly decoded address because OCR decoding does not employ checksums and other techniques that are available to verify the accuracy of machine readable codes.

[0011] Therefore, there is a need in the art for a system that reads and decodes bar codes and text, and which verifies the accuracy of the destination address data. Furthermore, there is a need for a system that provides a method for correcting improperly decoded destination address data, and for combining the destination address data and the decoded bar code data to form a unified package record, which may be used to track and sort the package as it moves through the package delivery system.

Summary of the Invention

[0012] The invention seeks to provide a system that reads and decodes all relevant package data from a package, and that provides a unified package record including relevant package data.

[0013] In accordance with the invention, this object is accomplished in a method for reading and combining package information from a package that includes first and second information indicia. The method includes capturing an electronic image of the package, including the first and second information indicia. The machine readable first information indicia is automatically located and decoded to provide package identification data. The alphanumeric second information indicia is automatically located and decoded to provide package destination data. The package identification and destination data are then combined to form a unified package record. The unified package record may be stored in a database or printed on a label in the form of a machine readable third information indicia and affixed to the package.

[0014] Furthermore, this object is accomplished in a system as defined in claim 9. A prefered embodiment of the invention provides a method for reading and verifying package information from a package. This method is further characterized by verifying the decoded package destination data to determine whether it is valid. If not, at least a portion of the electronic image is displayed on a workstation, and a manually entered package destination data is then received from an operator at the workstation. The unified package record includes the package identification data and the manually entered package destination data.

[0015] A system and method for reading package information formed in accordance with the invention has a number of advantages. A package bears at least one label that includes information indicia such as a destination address and a machine readable symbol (for example, a bar code or two-dimensional dense code) bearing a package identification number. As packages move along a conveyor belt, an image of each package is captured and the indicia are decoded. The decoded destination address may be validated by checking a database of valid addresses. If the decoded address is invalid, an image of the address is displayed on an image display workstation, and an operator enters the correct destination address. The symbol data and destination address are combined to form a unified package record, which may be used to sort and track the package. The unified package record may be stored in a database or printed on a label in the form of another machine readable information indicia and affixed to the package.

Brief Description of the Drawings

[0016]

Fig. 1 is a block diagram of a system for reading package information in accordance with the present invention.

Fig. 2 is a diagram of a parcel including a fluorescent ink fiduciary mark located within the destination address block of the parcel.

Fig. 3 is a flow diagram of the process for reading package information carried out by the system of Fig. 1.

Fig. 4 is a flow diagram of the preferred method for processing image data provided by the imaging system that forms a part of the system of Fig. 1.

Fig. 5 is a flow diagram of the preferred method for correcting incorrectly decoded destination address data.

Detailed Description of the Preferred Embodiment

[0017] The present invention provides a novel system and method for reading package information. Generally described, the system includes an imaging system that provides a digital image of a surface of a package that is moving on a conveyor belt. The image includes a bar code and destination address that are provided on the package surface. A label decoding system processes the image from the imaging system and decodes the bar code and the destination address data. The destination address data is validated by checking the address against the United States Postal Service's ZIP+4 database, which contains all of the valid addresses in the United States. If the destination address was decoded incorrectly, the portion of the image that includes the destination address is displayed on an image display workstation, along with a list of possible addresses from the database. An operator reads the destination address data from the display and manually enters it into the computer terminal or selects the correct address from a displayed list of possible addresses. After the destination address has been validated or manually entered, the bar code data and destination address data are combined to form a unified package record, which provides efficient means for automatically tracking and sorting packages. This data may be stored in a database or printed on labels and affixed to the package.

[0018] Before describing the present invention in additional detail, it is useful to discuss the nomenclature of the specification. Portions of the detailed description that follows are represented largely in terms of processes and symbolic representations of operations performed by computer components, including a central processing unit (CPU), memory storage devices for the CPU, and connected display devices. These operations include the manipulation of data by the CPU and the

maintenance of these data within data structures resident in one or more of the memory storage devices. The symbolic representations are the means used by those skilled in the art of computer programming and computer construction to most effectively convey teachings and discoveries to others skilled in the art.

[0019] For the purposes of this discussion, a process or portions thereof may be generally conceived to be a sequence of computer-executed steps leading to a desired result. These steps generally require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical, magnetic, or optical signals capable of being stored, transferred, combined, compared, or otherwise manipulated. It is conventional for those skilled in the art to refer to these signals as bits, values, elements, symbols, characters, terms, objects, numbers, records, files or the like. It should be kept in mind, however, that these and similar terms should be associated with appropriate physical quantities for computer operations, and that these terms are merely conventional labels applied to physical quantities that exist within and during operation of the computer.

[0020] It should also be understood that manipulations within the computer are often referred to in terms such as adding, comparing, moving, etc. which are often associated with manual operations performed by a human operator. In most cases, it will be apparent that these steps are performed by a computer without requiring input from an operator. In some cases, the operations described herein are machine operations performed in conjunction with a human operator that interacts with the computer. The machines used for performing the operation of the present invention include general purpose digital computers or other similar computing devices.

[0021] In addition, it should be understood that no particular programming language is provided, and that the programs, processes, methods, etc. described herein are not limited to any particular computer or apparatus. Those skilled in the art will appreciate that there are many computers and operating systems which may be used in practicing the instant invention and therefore no detailed computer program could be provided which would be applicable to these many different systems. Each user of a particular computer or operating system will be aware of the program modules and tools that are most appropriate for that user's needs and purposes.

[0022] Referring now the drawings, in which like numerals represent like elements throughout the several figures, the present invention will be described.

The System for Reading Package Information

[0023] Fig. 1 illustrates a system **10** for reading and decoding package information as packages travel on a conveyor belt. The system **10** includes an imaging system **12** and a label decoding system **14**. Generally described, the preferred imaging system **12** is a two-camera system that includes a high resolution over-the-belt (OTB) camera **16** and a fiduciary mark detector **24**, which includes the second camera. The high resolution OTB camera **16** and fiduciary mark detector **24** are mounted above a conveyor belt **18** that carries packages **20a-c** in the direction of arrow **22**. Together, the high resolution OTB camera **16** and fiduciary mark detector **24** ascertain the position and orientation of a fluorescent ink fiduciary mark located within a destination address block on the surface of a package, capture an image of the top surface of the package, and provide the image and the location and orientation of the fiduciary mark to the label decoding system **14**. The label decoding system **14** includes general purpose and high performance computers and data storage facilities. The label decoding system **14** is connected to an image server **29**, which is connected to at least one image display workstation **30a-c**, and to a label printer **32**. The label decoding system **14** locates and decodes machine readable package identification data (e.g., a bar code) and destination address data contained in the image. This package identification data and destination address data are combined to form a unified package record, which may be stored in a database or printed in machine readable form on a label and affixed to the package.

[0024] Fig. 2 illustrates the top surface **34** of a package **20** that is processed by the preferred system **10**. The top surface **34** of each package **20** includes package tracking information in the form of a machine readable code or symbol such as a bar code **36**. The package tracking information represented by the bar code uniquely identifies the package and distinguishes it from the other packages in the delivery system. The top surface of the package also includes a destination address **38**, which typically consists of alphanumeric text arranged in two or more lines. The destination address **38** is located in an area referred to as the destination address block **40**. A fiduciary mark such as fluorescent ink fiduciary mark **42** is located approximately in the center of the destination address block **40** in the same area as the text defining the destination address. The fiduciary mark **42** is applied to the destination address block **40** by the shipper or by an agent of the small package delivery company. This may be accomplished by using a rubber stamp in the shape of the desired fiduciary mark to apply fluorescent ink to the package surface. Those skilled in the art will appreciate that other types of fiduciary marks may be used.

[0025] Referring again to Fig. 1, the components and operation of the imaging system **12** and the label decoding system **14** will be described in additional detail. In addition to the high resolution OTB camera **16** and fiduciary mark detector **24**, the imaging system **12** includes a package height sensor **26**, and an illumination source **28**. As packages are transported by the conveyor belt **18** the packages **20a-c** first pass under the fiduciary

mark detector **24**, which detects a fiduciary mark in order to determine the location and orientation of the destination address block. The package height sensor **26** is a commercially available light curtain, and is used to determined the height of the package before it passes beneath the high resolution OTB camera **16**. The height information from the height sensor **26** is used by the high resolution camera's focusing system. This permits the high resolution camera **16** to accurately focus on the top surface of the package **20c** as it moves beneath the camera. The illumination source **28** illuminates the top surface of the package **20c** as it passes beneath the high resolution camera **16**. The location and orientation information are provided to the label decoding system **14** along with the image from the high resolution camera **16**.

[0026] The conveyor belt system is used to transport packages through a terminal facility. In the preferred system **10**, the conveyor belt **18** is **16** inches wide and carries up to 3,600 packages per hour while moving at a rate of up to 100 feet per minute. The packages **20**a-c vary in height and may be arbitrarily oriented on the conveyor belt **18**. The conveyor belt **18** moves each package beneath the fiduciary mark detector **24** and high resolution camera **16** in single file, and with some amount of space between them. The packages are separated by a device known as a singulator. A suitable singulator is described in U.S. Patent No. 5,372,238 to *Bonnet* , entitled "Method and Apparatus for Singularizing Objects "

[0027] The conveyor belt **18** includes a belt encoder **44** that is used to determine the speed and position the associated conveyor belt. Those skilled in the art will appreciate that the speed and position of the conveyor are needed in order to synchronize the position of the fiduciary mark, the package height information, and the position of the package as it passes beneath the high resolution camera **16**. The belt encoder supplies a signal indicating the speed of the conveyor **18** to the fiduciary mark detector **24** and the high resolution camera **16**. The signal from the encoder is used to produce a line clock signal that is used to trigger cycles of the fiduciary mark detector's low resolution camera (i.e., exposures of the line of CCD pixels comprising the low resolution camera). Each cycle captures a row of the image of the surface of a parcel as it moves past the fiduciary mark detector **24**. The belt encoder **44** is selected to provide a pulse for each cycle of the high resolution camera **16**. Those skilled in the art will appreciate that the signal from the encoder allows the line images captured by the fiduciary mark detector **24** and high resolution camera **16** to be assembled by the label decoding system **14** into two-dimensional images with the correct aspect ratios. A more detailed description of the interaction between an OTB camera, conveyor belt, height information processor, and belt encoder is provided in U.S. Patent No. 5,291,564 to *Shah* , entitled "System and Method for Acquiring an Optical Target," which is incorporated herein by reference.

[0028] A suitable fiduciary mark detector is described in pending U.S. Application No. 08/419,176, filed April 10, 1995, and entitled "Method for Locating the Position and Orientation of a Fiduciary Mark," which is assigned to the assignee of the present invention and is incorporated herein by reference. The fiduciary mark detector **24** includes a low resolution CCD camera, a video processor, and an ultraviolet light source for illuminating the fluorescent ink that forms the fiduciary mark. The conveyor belt **18** moves a package **20a** through the field of view of the low resolution CCD camera. The video processor controls the operation of the low resolution camera and sequentially transmits a one-bit (i.e., black/white) video signal corresponding to the image captured by the low resolution camera to the label decoding system **14**. The preferred low resolution camera is a low resolution, monochrome, 256 pixel line-scan type camera such as a Thompson TH7806A or TH7931D. The ultraviolet light source illuminates the package **20a** as it is conveyed through the viewing area of the low resolution camera, which captures an image of the surface of the package **20a**. The low resolution camera is fitted with a commercially available optical filter that transmits yellow/green light such as that emitted by fluorescent ink exposed to ultraviolet light and attenuates light in other portions of the visible spectrum. The low resolution camera is thus configured to be responsive to the yellow/green light emitted by the illuminated fiduciary mark, and not to the other indicia found on the package surface. More specifically, the optical filter causes the low resolution camera to be responsive to the yellow/green light emitted from the commercially available National Ink No. 35-48-J (Fluorescent Yellow) in response to ultraviolet light.

[0029] Referring again to Fig. 2, the preferred fiduciary mark **42** will be described in additional detail. The preferred fiduciary mark **42** comprises two fluorescent non-overlapping circles of different diameter. As used herein, a circle means either an annulus or the area bounded by an annulus. The fiduciary mark **42** includes a large circle and a small circle oriented such that a vector from the center of large circle to the center of the small circle is oriented approximately in the same direction as underlying text of the destination address **38**. The position of the fiduciary mark **42** is defined to be the mid-point of the vector. It will be clear to those skilled in the art that alternative embodiments might include locating the fiduciary mark elsewhere on the parcel in a known relation to a text bearing area, or in a different known relationship to the underlying text. The fiduciary mark **42** is typically applied to a parcel using a conventional rubber stamp and fluorescent ink after the destination address **38** has been affixed to the parcel. It will be appreciated that the fiduciary mark **42** might be carried on a label, preprinted upon the parcel, or might be carried upon a transparent envelope into which an address label is placed.

[0030] For the preferred fiduciary mark **42**, the diameter of the large circle is approximately 3/4 of an inch, the diameter of the small circle is approximately 7/16 of an inch, and the distance separating them is approximately 1/4 of an inch. It is noted that a limit is imposed upon the size of the fiduciary mark **42** by the resolution of the low resolution camera that forms a part of the fiduciary mark detector **24**. For example, the fiduciary mark **42** may be made smaller if the low resolution camera has a higher resolution, and the resolution of camera may be reduced if the fiduciary mark is made larger.

[0031] Those skilled in the art will appreciate that a fiduciary mark can be any mark that identifies the location of the destination address and that the preferred fiduciary mark comprising two circles is simply one of a variety of possible choices. Those skilled in the art will also appreciate that although the preferred fiduciary mark indicates the location and orientation of the destination address it is possible to use a fiduciary mark that indicates only location. In such a case, the orientation would be determined by applying an appropriate processing technique to the image of the destination address block.

[0032] The preferred system **10** also defines a region of interest defined with respect to the fiduciary mark **42**. The region of interest is defined in terms of the high resolution camera to be a 1k by 1k square (i.e., 1,024 pixels by 1,024 pixels, which is equivalent to approximately four inches by four inches) centered on the defined position of the fiduciary mark **42**. The label decoding system **14** determines the position and orientation of the fiduciary mark **42** and defines the region of interest with respect to the position of the fiduciary mark **42**. The label decoding system then creates and stores a high resolution text image within the region of interest from the data captured by the high resolution camera **16**. In this manner, only a relatively small portion of the data captured by the high resolution camera **16** is processed in order to decode the destination address data.

[0033] The package height sensor **26** is a commercially available light curtain, and is used to determined the height of the package before it passes beneath the high resolution OTB camera **16**. The height information from the height sensor **26** is used by the high resolution camera's focusing system.

[0034] The preferred illumination source **28** includes an unsymmetrical elliptical reflector. The reflector is shaped by first and second elliptical surfaces. The first and second elliptical surfaces share a common first focus, along which the light source is located. The first and second elliptical surfaces have different second loci. Thus, half of the elliptical surface concentrates the light at one level and the other half concentrates the light at a second level. Together, the first and second elliptical surfaces develop intense illumination between their respective second focal axes.

[0035] The high resolution camera **16** is preferably a monochrome, 4,096 pixel line-scan type camera such as one using a Kodak KLI-5001 CCD chip. Each pixel measures approximately 7 microns x 7 microns. The CCD array is sufficiently wide to scan the entire width of the conveyor belt. The image of the package is captured one "slice" at a time as the package moves beneath the camera. The high resolution camera **16** transmits an eight-bit gray-scale video signal corresponding to the captured image to the label decoding system **14**. Illumination source **28** provides bright white light in order to illuminate the package as it is conveyed through the viewing area of the high resolution camera **16**, which captures an image of the surface of a package. The high resolution camera **16** is responsive to a gray-scale light pattern such as that reflected by black ink text on the surface of the package **20c**. The high resolution camera **16** is relatively unresponsive to light such as that reflected by fluorescent ink when illuminated by white light. More specifically, the commercially available National Ink No. 35-48-1 (Fluorescent Yellow) is substantially invisible to the high resolution camera **16** when illuminated by the white light source **28**.

[0036] Suitable high resolution camera systems are described in U.S. Patent Nos. 5,327,171 to *Smith et al.*, entitled "Camera System Optics" ("the '171 patent"), and 5,308,960 to *Smith et al.*, entitled "Combined Camera System," and in allowed U.S. Application No. 08/292,400, filed August 18, 1994, entitled "Optical Path Equalizer" ("the Optical Path Equalizer application"), all of which are assigned to the assignee of the present invention and incorporated herein by reference.

[0037] The '171 patent describes an OTB camera system for capturing images of packages as they move beneath the camera on a conveyor belt. The system described in the '171 patent includes an illumination source, a belt encoder for determining the speed and position of the conveyor belt, and a processing subsystem that searches for a number of different acquisition targets.

[0038] The Optical Path Equalizer application describes an OTB camera with an optical system that equalizes the path between the OTB camera and the package located beneath the camera. This allows the camera to accurately focus on the package surface regardless of the package's height, and also maintains an approximately constant image size regardless of the height of the package. The optics assembly includes a pair of movable mirrors and an array of fixed mirrors. The movable mirror are mounted on pivot pins and are rotated by one or more actuators. The array of fixed mirrors includes a plurality of mirrors positioned at increasing distances from the movable mirrors as to provide a plurality of different optical path lengths between the camera and the package surface. The Optical Path Equalizer application also describes the use of a height sensing device such as a commercially available light curtain. The data from the height sensing device is used to determine the optical path length of the variable optical subsystem.

[0039] The label decoding system **14** processes the data provided by the imaging system **12**. The label decoding system **14** includes input/output devices for receiving data from the fiduciary mark detector **24** and the high resolution camera **16**. The label decoding system includes both general purpose computers and high performance computers. The high performance computers, such as Adaptive Solutions CNAPS processor and Imaging Technologies 150/40 processor, are used to run that OCR algorithms that are used to decode the alphanumeric destination address data. The general purpose computers, such as Heurikon Nitro 60 and Heurikon HKV4D computers, are used to process the location and orientation data from the fiduciary mark detector **24** and to decode detect and decode the bar code that includes the package tracking information. The label decoding system includes storage devices such as memory, disk drives and tape drives. The label decoding system may also be connected to other computing equipment that is used for package tracking, billing, etc.

[0040] The label decoding system **14** is connected to a image server **29**, which is connected to a network that includes a plurality of image display workstations **30**a-c. If the label decoding system is unable to verify a decoded destination address by reference to the U.S. Postal Service's ZIP+4 database, the system **10** displays the destination address image on one of the image display workstations **30**a-c, where it is viewed by an operator. The displayed destination address image is accompanied by the closest addresses from the database. The operator than reads the address on the display and manually enters the correct address or selects the correct address from the list of the closest addresses. Thus, the image display workstation must include a display, a processor, input means such as a keyboard, and input/output means for communication data to and from the label decoding system. The preferred image display workstations **30**a-c are IBM compatible personal computers based on Intel Corporation's PENTIUM processor and running Microsoft Corporation's WINDOWS NT operating system. Those skilled in the art will appreciate that the image display workstations may include any computer imaging system or other computer image processor capable of receiving and processing pixel images and other information at high rates of speed, and that the number of such image display workstations used in a facility will depend on the volume of packages moving through the system and various other factors. Those skilled in the art will also appreciate that the image server **29** may be any computer or network server capable of being connected to the image display workstations and capable of transferring and processing pixel images at high rates of speed.

[0041] The label decoding system is also connected to at least one label printer **32**. As mentioned briefly above, the decoded package identification information and destination address are combined to form a unified package record, which may be used to facilitate the track and sorting of the package throughout the delivery system. While the unified package record may be stored in a database, it may also be printed on a label and automatically affixed to the package as it travels on the conveyor belt. The preferred label printer **32** is an automatic label applicator, manufactured by Accusort. In the preferred system **10**, the unified package record is printed in machine readable dense code, such as the codes described in U.S. Patent Nos. 4,896,029 to *Chandler et al.*, entitled "Polygonal Information Encoding Article, Process and System" and 4,874,936 to *Chandler et al.*, entitled "Hexagonal, Information Encoding Article, Process and System." Those skilled in the art will appreciate that the number of label printers will depend on the configuration of the conveyor system, the number of packages moving through the system, and other factors.

The Preferred Method for Reading Package Information

[0042] The preferred method for reading package information will now be discussed in conjunction with Figs. 3-5. As described above, the system **10** is operative for capturing an image of a package as it travels on a conveyor belt, and detecting and decoding a bar code and OCR address data that appear on the package. The OCR data is validated and, if not accurate, is displayed on a terminal where an operator can manually enter the address data. The decoded bar code data and address data are combined to form a unified package record, which is subsequently used to sort and track the package.

[0043] Fig. 3 is a flow diagram illustrating the preferred method **300** for reading package information. The steps that form the method **300** are carried out by the various equipment that forms a part of the system **10** for reading package information. The method **300** begins at step **302** by determining the location and orientation of the destination address block. In the preferred system, this is accomplished as the package moves beneath the fiduciary mark detector **24**, which is described above in conjunction with Figs. 1 and 2. The coordinate and orientation information from the fiduciary mark detector are provided to the label decoding system **14**, where they are used to process the image that is provided by the high resolution camera **16**.

[0044] After the package is scanned by the fiduciary mark detector, the package height is determined by the package height sensor **26** at step **304**. At step **306** a high resolution image of the top of the package is captured by the high resolution OTB camera **16** as the package passes beneath the high resolution camera. This image is provided to the label decoding system **14**. The high resolution camera **16** uses the package height data from the package height sensor **26** to adjust the

local length of the camera and ensure that the camera is properly focused regardless of the height of the package.

[0045] At step **308** the label decoding system **14** processes the data from the belt encoder **44**, the fiduciary mark detector **24**, and the high resolution camera **16**. Generally described, the processing performed by the label decoding system includes locating and decoding the bar code, locating and decoding the destination address, verifying the accuracy of the destination address, and receiving a manually entered destination address if needed. The particular steps involved in processing the data are described below in conjunction with Fig. **4**.

[0046] At step **310** the bar code and destination address data are combined to form a unified package record, which is stored in a database or printed on a label and affixed to the package at step **312**. The data contained in the unified package record is subsequently used for sorting and tracking the package as it moves through the delivery company's system. The method **300** terminates at step **314**.

[0047] Fig. 4 is a flow diagram illustrating the preferred method **308** for processing image data. This method is carried out by the label decoding system **14** and forms a part of the method **300** of Fig. 3. The method **308** begins at step **400** when the label decoding system receives the data from the belt encoder **44**, the fiduciary mark detector **24** and the high resolution OTB camera **16**. As described above, the high resolution camera provides an image of the top of a package. The image includes a bar code **36** and a destination address **38**. The fiduciary mark detector provides data indicating the location and orientation of the destination address block **40**.

[0048] At step **402** the label decoding system **14** locates and decodes the bar code **36** or other machine readable symbol, which is contained in the image provided by the high resolution camera **16**. Those skilled in the art will be familiar with various systems and methods for locating and decoding bar codes. Suitable methods for locating and decoding the bar code **36** are described in U.S. Patent Nos. 5,343,028 to *Figarella et al.*, entitled "Method and Apparatus for Detecting and Decoding Bar Code Symbols Using Two-Dimensional Digital Pixel Images," 5,352,878 to *Smith et al.*, entitled "Method and Apparatus for Decoding Bar Code Symbols Using Independent Bar and Space Analysis," 5,412,196 to *Surka*, entitled "Method and Apparatus for Decoding Bar Code Images Using Multi-Order Feature Vectors," and 5,412,197 to *Smith*, entitled "Method and Apparatus for Decoding Bar Code Symbols Using Gradient Signals," all of which are assigned to the assignee of the present invention and incorporated herein by reference. Those skilled in the art will appreciate that the machine readable code or symbol decoded by the label decoding system may include a bar code or a two-dimensional code.

[0049] At step **404** the method **308** begins the process of locating and decoding the destination address. Steps **404** through **422** are associated with the application of optical character recognition (OCR) techniques to the image provided by the high resolution camera **16**. This process is carried out in parallel with decoding the bar code (step **402**).

[0050] At step **404** the label decoding system selects a subimage of the package surface from the image provide by the high resolution camera **16**. In the preferred system, this subimage is referred to as a region of interest (ROI), which is defined with respect to the fiduciary mark **42**. In terms of the image from the high resolution camera, the region of interest is a 1k by 1k square (i.e., 1,024 pixels by 1,024 pixels, which is equivalent to approximately four inches by four inches) centered on the defined position of the fiduciary mark **42**. The label decoding system **14** determines the position and orientation of the fiduciary mark **42** and rises that information to define the region of interest with respect to the position of the fiduciary mark **42**. The label decoding system then creates and stores a high resolution text image within the region of interest from the data captured by the high resolution camera **16**. In this manner, only a relatively small portion of the data captured by the high resolution camera **16** is processed in order to decode the destination address data. This image is referred to as the region of interest (ROI) image.

[0051] Although the system **10** locates the destination address block using the information provided by the fiduciary mark detector **24**, those skilled in the art will appreciate that software techniques may be implemented to detect the location and orientation of the destination address from the image provided by the high resolution OTB camera. Suitable techniques would eliminate the need for the fiduciary mark detector, but would require additional computing resources in the label decoding system **14**. Such software techniques may be used without departing from the spirit and scope of the present invention. Furthermore, those skilled in the art will appreciate that the fiduciary mark detector described above may be replace with other apparatus for indicating and detecting the location and orientation of an indicia on a package, such as the systems described in U.S. Patent Nos. 4,516,265 to *Kizu et al.* and 5,103,489 to *Miette*.

[0052] At step **406** the method performs adaptive thresholding on the ROI image. This technique involves binarizing the ROI image and creating three different binarized images using three different threshold values. The three threshold values are determined by measuring the contrast and relative brightness of the ROI image.

[0053] At step **408** the three images resulting from step **406** are run length encoded. At step **410** the best of the three run length encoded images is selected for further processing.

[0054] Suitable methods for carrying out steps **406**,

408, 410 are described in commonly owned U.S. Application No. 08/380,732, filed January 31, 1995, entitled "Method and Apparatus for Separating Foreground From Background in Images Containing Text," which is incorporated herein by reference.

[0055] At step **412** the label decoding system performs a coarse rotation of the selected run length encoded image. The coarse rotation is the first of a two-step process that is designed to make the ROI image appear horizontal in order to simplify the separation of the characters. Generally described, the information derived from the fiduciary mark indicates the orientation of the destination address block and how far off of horizontal it is. The coarse rotation is the first step toward rotating the image to where the destination address appears horizontal.

[0056] The preferred method for rotating the ROI image is described in commonly owned U.S. Application No. 08/507,793, filed July 25, 1995, entitled "Method and System for Fast Rotation of Run-Length Encoded Images," which is incorporated herein by reference. Those skilled in the art will appreciate that the coarse rotation process is relatively quick and rotates the image to within ± 7 degrees of horizontal.

[0057] At step **414** the label decoding system identifies the lines of text that are contained in the destination address block **40**. This is accomplished by subsampling the image by a factor of 3 in the x and y directions, executing a connected components process that finds groups of linked pixels, and applying a Hough transform that finds line locations and orientations from the linked pixels.

[0058] Once the lines are found using the reduced resolution method, the original lines are restored to full resolution using the location information generated by the Hough transform. Another connected components analysis is applied to the full resolution lines in order to capture the text characters. Those skilled in the art will understand that connected components analysis and Hough transforms are standard image processing techniques.

[0059] Once the lines are identified, the method **308** proceeds to step **416** and performs a fine rotation on the characters included in each line of the destination address. This fine rotation completes the rotation process begun at step **412** and rotates the characters to horizontal (i.e., zero degrees). This ensures that the characters are properly oriented for the application of the OCR algorithm, which attempts to decode each character in the destination address. This step is accomplished by applying forward rotational techniques. The preferred rotational techniques are described by the following formulas:

$$x_{new} = (x_{old} * \cos\phi) + (y_{old} * \sin\phi)$$

$$y_{new} = (x_{old} * \sin\phi) - (y_{old} * \cos\phi)$$

where ϕ is the orientation of the destination address after the coarse rotation performed at step **412**.

[0060] At step **418** the rotated characters are segmented or separated into separate characters. This is done because the OCR algorithm is applied to each character individually. At step **420** the OCR algorithm is applied to each of the characters in the destination address. Those skilled in the art will appreciate that the OCR algorithm uses a variety of techniques to recognize each characters and to determine what standard ASCII characters is represented by each character in the destination address. Those skilled in the art will also appreciate that the OCR algorithm may be used to decode other alphanumeric information on the package, such as the return address, shipper number, etc. A suitable OCR technique is described in U.S. Patent No. 5,438,629, entitled "Method and Apparatus for Classification Using Non-spherical Neurons," which is incorporated herein by reference.

[0061] At step **422** the OCR processed text is filtered to remove any characters that are not a part of the destination address.

[0062] At step **424** the OCR processed destination address is validated or verified by attempting to match the decoded destination address with an address in the U.S. Postal Service's ZIP+4 database, which provides an exhaustive list of valid addresses in the United States. This step is necessary because the destination address and OCR algorithms do not include built in verification means such as checksums, etc.

[0063] At step **426** the method **308** determines whether the decoded destination address matched a valid address in the ZIP+4 database or other database of valid addresses. If so, the method continues to step **428** where it returns to step **310** of the method **300** (Fig. 3). Related methods for processing data in databases are described in commonly owned U.S. Application Serial No. 08/477,481, filed June 7, 1995 and entitled "A Multi-Step Large Lexicon Reduction Method for OCR Application," which is incorporated herein by reference.

[0064] If the decoded address does not match a valid address in the ZIP+4 database, the method **308** proceeds to step **430** and automatically attempts to correct common OCR errors in order to automatically provide a valid address. Typical OCR errors involve incorrectly decoding letters that look similar. Therefore, step **430** is optimized to correct OCR errors by substituting such letters in an attempt to match one of the valid addresses that appears in the address database.

[0065] Those skilled in the art will understand that the validation process is tunable and involves three parameters. The accuracy rate indicates the percentage of labels that are automatically read correctly. The error rate indicates the percentage of labels that the system thinks it is has correctly, but are in fact incorrect. The rejection rate indicates the percentage of labels that are not read correctly and which must be entered manually. The OCR validation process is tuned by first determin-

ing an acceptable error rate. Once this is determined, the system is tuned by adjusting the parameter that controls the relationship between the rejection rate and the error rate.

[0066] At step **432** the method determines whether the substituted characters have resulted in a valid address. If so, the method proceeds to step **428**.

[0067] If the method is unable to match correct the decoded address and match a valid address in the ZIP+4 database, the method proceeds to step **434** and transfers the image to a the image server **29**, which is connected to one or more image display workstations. The image display workstations display an image of the destination address block and the closest possible addresses from the database. The image display workstation allows an operator to view the image of the destination address and manually enter the destination address into the workstation. This process (step **436**) is described more completely in conjunction with Fig. 5.

[0068] At step **438** the method **308** receives the manually entered destination address data from the image server. The information returned by the image server may take the form of manually entered address data or a selected one of the possible addresses from the database. After the address data is received from the image server, the method **308** proceeds to step **428** and returns to the method **300**.

[0069] Fig. 5 is a flow diagram illustrating a method **500** carried out by the image server **29** and the image display workstations **30**a-c that form a part of the preferred system **10**. As described above, the image display workstations are used to allow an operator to manually enter destination addresses that were not properly matched to valid addresses in the ZIP+4 database. This is accomplished by displaying an image of the destination address and the closest possible addresses from the database. The operator reads the address as it appears on the display and manually enters the address into the workstation or selects one of the displayed addresses. This manually entered address data is then returned to the label decoding system **14** where it replaces the improperly decoded OCR data.

[0070] The method **500** begins at step **502** where the image server receives the image of the destination address from the label decoding system **14**. The image server routes the image to a free image display workstation. At step **504** the image display workstation rotates the image to the nearest horizontal or vertical axis. At step **506** the rotated image is interpolated to form an image having a resolution of at least 100 dots per inch (DPI) image, which is displayed at step **508**. In addition to the destination address image, the workstation also displays the closest possible matches from the ZIP+4 database.

[0071] At step **510** the operator manually enters the destination address after having read the destination address presented on the display. The operator manually enters the correct destination address by selecting the correct address from the closest possible matches (if the correct address is displayed) or entering the address using a keyboard associated with the image display workstation.

[0072] At step **512** the method determines whether the destination address data entered by the operator was selected from the list of possible addresses selected from the database. If so, the method proceeds to step **514** and returns the correct destination address to the image server **29**, which returns the data to the label decoding system **14**. The method **500** then terminates at step **518**.

[0073] If at step **512** the method determines that the destination address data was typed in by the operator, the method goes to step **516** to validate the typed-in data. Those skilled in the art will appreciate that the error correction routine may be carried out at the image display workstation where the data was entered, at the image server after the data was returned from the image display workstation, or at a separate validation computer connected to the image server via the network.

[0074] Those skilled in the art will appreciate that the validation process of step **516** determines whether the keyed in address matches a valid address from the database. If not, the method also attempts to correct common key entry mistakes in order to see if the corrected key entered data matches one of the addresses from the database. The validation/correction process is similar to the correction process described in conjunction with step **430** of Fig. 4, but is optimized for common key entry errors, which include substituting keys that are close together on the keyboard or letters that are transposed by the operator. The correction can be carried out by attempting to match a valid address from any address in the ZIP+4 database, or by trying to match one of the few close addresses transferred to the image display workstation from the label decoding system.

[0075] After the manually entered destination address data is validated, the method proceeds to step **514** and returns the correct destination address to the image server **29**, which returns the data to the label decoding system **14**. The method **500** then terminates at step **518**.

[0076] From the foregoing description, it will be appreciated that the present invention provides an efficient system and method for reading package information. The present invention has been described in relation to particular embodiments which are intended in all respects to be illustrative rather than restrictive. Those skilled in the art will appreciate that many different combinations of hardware will be suitable for practicing the present invention. Many commercially available substitutes, each having somewhat different cost and performance characteristics, exist for each of the components described above.

[0077] Similarly, the method of the present invention

may conveniently be implemented in program modules that are based upon the flow charts in Figs. 3-5. No particular programming language has been indicated for carrying out the various procedures described above because it is considered that the operations, steps and procedures described above and illustrated in the accompanying drawings are sufficiently disclosed to permit one of ordinary skill in the art to practice the instant invention. Moreover, there are many computers and operating systems which may be used in practicing the instant invention and therefore no detailed computer program could be provided which would be applicable to these many different systems. Each user of a particular computer will be aware of the language and tools which are most useful for that user's needs and purposes.

[0078] Alternative embodiments will become apparent to those skilled in the art to which the present invention pertains without departing from its scope. Accordingly, the scope of the present invention is defined by the appended claims rather than the foregoing description.

Claims

1. A method for reading package information from a package (20) and for combining said package information, said package information including package identification data represented by a machine-readable first information indicia (36) and package destination data represented by an alphanumeric second information indicia (38), said method being characterized by the steps of:

   capturing an electronic image of said package (20), said electronic image including said machine-readable first information indicia (36) and said alphanumeric second information indicia (38);
   automatically locating said machine-readable first information indicia (36) in said electronic image;
   automatically decoding said machine-readable first information indicia (36) to provide said package identification data;
   automatically locating said alphanumeric second information indicia (38) in said electronic image;
   automatically decoding said alphanumeric second information indicia (38) to provide said package destination data; and
   combining said package identification data and said package destination data to form a unified package record.

2. The method of Claim 1, further characterized by the steps of:

   determining whether said package destination data is valid;
   if said package destination data is invalid, displaying at least a portion of said electronic image on a workstation (30); and
   receiving manually entered package destination data, and
   wherein said unified package record comprises said package identification data and said manually entered package destination data.

3. The method of Claim 2, further characterized by said manually entered package destination data comprising a destination address selected from a list of possible destination addresses displayed on said workstation (30).

4. The method of Claim 1 or Claim 2, further characterized by said first information indicia (36) comprising a bar code and said package identification data comprising a package identification number.

5. The method of Claim 1 or Claim 2, further characterized by the step of storing said unified package record in a database.

6. The method of Claim 1 or Claim 2, further characterized by the step of:

   affixing third information indicia to said package (20), said third information indicia being machine-readable and comprising said unified package record.

7. The method of Claim 1 or Claim 2, further characterized by the step of locating said alphanumeric second information indicia (38) comprising the steps of:

   identifying a mark (42) indicative of the location of said alphanumeric second information indicia (38); and
   using said mark (42) to locate said alphanumeric second information indicia (38).

8. The method of Claim 7, further characterized by the step of rotating said alphanumeric second information indicia (38).

9. A system for automatically reading package information from a package (20) and for combining said package information, said system including a camera (16) for capturing an electronic image of said package (20), said package information including package identification data encoded in a machine-readable first information indicia (36) and package destination data represented by an alphanumeric second information indicia (38), characterized by:

   a printer for printing a label to be affixed to said

package (20); and

a label decoding system (14) for processing said electronic image, said label decoding system (14) being programmed to:

automatically locate said machine-readable first information indicia (36) in said electronic image;

automatically decode said machine-readable first information indicia (36) to provide said package identification data;

automatically locate said alphanumeric second information indicia (38) in said electronic image;

automatically decode said alphanumeric second information indicia (38) to provide said package destination data; and

combine said package identification data and said package destination data to form a unified package record; and

print third information indicia on said label, said third information indicia being machine-readable and comprising said unified package record.

10. The system of Claim 9, further characterized by:

an image display workstation (30) for displaying at least a portion of said electronic image and for receiving manually entered data corresponding to said package destination data, and said label decoding system (14) being further programmed to:

determine whether said package destination data is valid;

if said package destination data is invalid, display at least a portion of said electronic image on said workstation (30); and

receive manually entered package destination data, and wherein said unified package record comprises said package identification data and said manually entered package destination data.

11. The system of Claim 9, further characterized by said machine-readable first information indicia (36) comprising a bar code and said package identification data comprising a package identification number.

12. The system of Claim 9 or Claim 10, further characterized by said label decoding system (14) being further programmed to store said unified package record in a database.

13. The system of Claim 9 or Claim 10, further characterized by said alphanumeric second information indicia (38) being located by:

identifying a mark (42) indicative of the location of said alphanumeric second information indicia (38); and

using said mark (42) to locate said alphanumeric second information indicia (38).

Patentansprüche

1. Verfahren zum Ablesen von Paketinformationen von einem Paket (20) und zum Kombinieren der Paketinformationen, wobei die Paketinformationen Paketidentifizierungsdaten, die durch einen maschinenlesbaren ersten Informationsaufdruck (36) dargestellt werden, und Paketzieldaten, die durch einen alphanumerischen zweiten Informationsaufdruck (38) dargestellt werden, enthalten, wobei das Verfahren durch die folgenden Schritte gekennzeichnet ist:

   Erfassen eines elektronischen Bildes des Pakets (20), wobei das elektronische Bild den maschinenlesbaren ersten Informationsaufdruck (36) und den alphanumerischen zweiten Informationsaufdruck (38) enthält;
   automatisches Auffinden des maschinenlesbaren ersten Informationsaufdrucks (36) in dem elektronischen Bild;
   automatisches Decodieren des maschinenlesbaren ersten Informationsaufdrucks (36) zur Bereitstellung der Paketidentifizierungsdaten;
   automatisches Auffinden des alphanumerischen zweiten Informationsaufdrucks (38) in dem elektronischen Bild;
   automatisches Decodieren des alphanumerischen zweiten Informationsauldrucks (38) zur Bereitstellung der Paketzieldaten; und
   Kombinieren der Paketidentifizierungsdaten und der Paketzieldaten zur Bildung eines vereinigten Paketdatensatzes.

2. Verfahren nach Anspruch 1, weiterhin durch die folgenden Schritte gekennzeichnet:

   Bestimmen, ob die Paketzieldaten gültig sind;
   wenn die Paketzieldaten ungültig sind, Anzeigen mindestens eines Teils des elektronischen Bildes auf einer Workstation (30); und
   Empfangen manuell eingegebener Paketzieldaten, und
   wobei der vereinigte Paketdatensatz die Paketidentifizierungsdaten und die manuell eingegebenen Paketzieldaten umfaßt.

3. Verfahren nach Anspruch 2, weiterhin dadurch gekennzeichnet, daß die manuell eingegebenen Paketzieldaten eine Zieladresse umfassen, die aus einer Liste möglicher Zieladressen ausgewählt wird, die auf der Workstation (30) angezeigt wird.

4. Verfahren nach Anspruch 1 oder 2, weiterhin dadurch gekennzeichnet, daß der erste Informationsaufdruck (36) einen Strichcode umfaßt und die Paketidentifizierungsdaten eine Paketidentifizierungsnummer umfassen.

5. Verfahren nach Anspruch 1 oder 2, weiterhin gekennzeichnet durch den Schritt des Speicherns des vereinigten Paketdatensatzes in einer Datenbasis.

6. Verfahren nach Anspruch 1 oder 2, weiterhin durch die folgenden Schritte gekennzeichnet:

Ankleben dritter Informationsaufdrucke an das Paket (20), wobei die Informationsauldrucke maschinenlesbar sind und den vereinigten Paketdatensatz umfassen.

7. Verfahren nach Anspruch 1 oder 2, weiterhin gekennzeichnet durch den Schritt des Auffindens des alphanumerischen zweiten Informationsaufdrucks (38), mit den folgenden Schritten:

Identifizieren einer Markierung (42), die die Position des alphanumerischen zweiten Informationsauldrucks (38) anzeigt; und
Verwenden der Markierung (42) zum Auffinden des alphanumerischen zweiten Informationsauldrucks (38).

8. Verfahren nach Anspruch 7, weiterhin gekennzeichnet durch den Schritt des Drehens des alphanumerischen zweiten Informationsaufdrucks (38).

9. System zum automatischen Ablesen von Paketinformationen von einem Paket (20) und zum Kombinieren der Paketinformationen, wobei das System eine Kamera (16) zum Erfassen eines elektronischen Bildes des Pakets (20) enthält, wobei die Paketinformationen Paketidentifizierungsdaten, die in einem maschinenlesbaren ersten Informationsaufdruck (36) codiert sind, und Paketzieldaten, die durch einen alphanumerischen zweiten Informationsaufdruck (38) dargestellt sind, enthalten, gekennzeichnet durch:

einen Drucker zum Drucken eines Etiketts zum Ankleben an dem Paket (20); und
ein Etikettendecodierungssystem (14) zur Verarbeitung des elektronischen Bildes, wobei das Etikettendecodierungssystem (14) für die folgenden Schritte programmiert ist:
automatisches Auffinden des maschinenlesbaren ersten Informationsaufdrucks (36) in dem elektronischen Bild;
automatisches Decodieren des maschinenlesbaren ersten Informationsaufdrucks (36) zur Bereitstellung der Paketidentifizierungsdaten;
automatisches Auffinden des alphanumerischen zweiten Informationsaufdrucks (38) in dem elektronischen Bild;
automatisches Decodieren des alphanumerischen zweiten Informationsaufdrucks (38) zur Bereitstellung der Paketzieldaten; und
Kombinieren der Paketidentifizierungsdaten und der Paketzieldaten zur Bildung eines vereinigten Paketdatensatzes; und
Drucken von dritten Informationsaufdrucken auf dem Etikett, wobei die dritten Informationsaufdrucke maschinenlesbar sind und den vereinigten Paketdatensatz umfassen.

10. System nach Anspruch 9, weiterhin gekennzeichnet durch:

eine Bildanzeigeworkstation (30) zum Anzeigen mindestens eines Teils des elektronischen Bildes und zum Empfangen manuell eingegebener Daten, die den Paketzieldaten entsprechen, und
dadurch, daß das Etikettendecodierungssystem (14) weiterhin für die folgenden Schritte programmiert ist:
Bestimmen, ob die Paketzieldaten gültig sind;
wenn die Paketzieldaten ungültig sind, Anzeigen mindestens eines Teils des elektronischen Bildes auf der Workstation (30); und
Empfangen manuell eingegebener Paketzieldaten, und wobei der vereinigte Paketdatensatz die Paketidentifizierungsdaten und die manuell eingegebenen Paketzieldaten umfaßt.

11. System nach Anspruch 9, weiterhin dadurch gekennzeichnet, daß der maschinenlesbare erste Informationsaufdruck (36) einen Strichcode umfaßt und die Paketidentifizierungsdaten eine Paketidentifizierungsnummer umfassen.

12. System nach Anspruch 9 oder 10, weiterhin dadurch gekennzeichnet, daß das Etikettendecodierungssystem (14) weiterhin dafür programmiert ist, den vereinigten Paketdatensatz in einer Datenbasis zu speichern.

13. System nach Anspruch 9 oder 10, weiterhin dadurch gekennzeichnet, daß der alphanumerische zweite Informationsaufdruck (38) durch die folgenden Schritte aufgefunden wird:

Identifizieren einer Markierung (42), die die Position des alphanumerischen zweiten Informationsaufdrucks (38) anzeigt, und
Verwenden der Markierung (42) zum Auffinden des alphanumerischen zweiten Informationsaufdrucks (38).

Revendications

1. Procédé pour lire une information sur un paquet à partir d'un paquet (20) et pour combiner ladite information relative au paquet ladite information relative au paquet comprenant des données d'identification du paquet représentées par un premier indice (36) d'information pouvant être lu par une machine et des données de destination du paquet représentées par un second indice d'information (38) alphanumérique, ledit procédé étant caractérisé par les étapes consistant à :

   saisir une image électronique dudit paquet (20), ladite image électronique comprenant ledit premier indice (36) d'information pouvant être lu par une machine et ledit second indice d'information alphanumérique (38) ;
   localiser automatiquement ledit premier indice (36) d'information pouvant être lu par une machine dans ladite image électronique ;
   décoder automatiquement ledit premier indice (36) d'information pouvant être lu par une machine de façon à fournir lesdites données d'identification du paquet ;
   localiser automatiquement ledit second indice (38) d'information alphanumérique dans ladite image électronique ;
   décoder automatiquement ledit second indice (38) d'information alphanumérique pour fournir lesdites données de destination du paquet , et
   combiner lesdites données d'identification du paquet et lesdites données de destination du paquet pour former un document d'enregistrement unifié du paquet.

2. Procédé selon la revendication 1, caractérisé en outre par les étapes consistant à :

   déterminer si lesdites données de destination du paquet sont valables ;
   si lesdites données de destination du paquet ne sont pas valables, afficher au moins une partie de ladite image électronique sur un poste de travail (30) ; et
   recevoir des données de destination de paquet entrées manuellement, et
   dans lequel ledit document d'enregistrement unifié de paquet comprend lesdites données d'identification du paquet et lesdites données de destination du paquet entrées manuellement

3. Procédé selon la revendication 2, caractérisé en outre par le fait que lesdites données de destination du paquet entrées manuellement comprennent une adresse de destination sélectionnée à partir d'une liste d'adresses de destination possibles affichée sur ledit poste de travail (30).

4. Procédé selon la revendication 1 ou la revendication 2, caractérisé en outre par le fait que ledit premier indice (36) d'information comprend un code barre et lesdites données d'identification du paquet comprennent un nombre d'identification du paquet.

5. Procédé selon la revendication 1 ou la revendication 2, caractérisé en outre par l'étape consistant à stocker ledit document d'enregistrement unifié de paquet dans une base de données.

6. Procédé selon la revendication 1 ou la revendication 2, caractérisé en outre par l'étape consistant à fixer un troisième indice d'information audit paquet (20), ledit troisième indice d'information pouvant être lu par une machine et comprenant ledit document d'enregistrement unifié du paquet.

7. Procédé selon la revendication 1 ou la revendication 2, caractérisé en outre par le fait que l'étape consistant à localiser ledit second indice (38) d'information alphanumérique comprend les étapes consistant à :

   identifier une marque (42) indiquant l'emplacement dudit second indice (38) d'information alphanumérique ; et
   utiliser ladite marque (42) pour localiser ledit second indice (38) d'information alphanumérique.

8. Procédé selon la revendication 7, caractérisé en outre par l'étape consistant à faire tourner ledit second indice (38) d'information alphanumérique.

9. Système pour lire automatiquement une information relative à un paquet à partir d'un paquet (20) et pour combiner ladite information de paquet, ledit système comprenant une caméra (16) pour saisir une image électronique dudit paquet (20), ladite information de paquet comprenant une donnée d'identification de paquet codée dans un premier indice (36) d'information pouvant être lu par une machine et une donnée de destination de paquet représentée par un second indice (38) d'information alphanumérique, caractérisé en ce qu'il comprend :

   une imprimante pour imprimer une étiquette destinée à être fixée audit paquet (20); et
   un système (14) de décodage d'étiquette pour traiter ladite image électronique, ledit système de décodage d'étiquette (14) étant programmé pour :
   localiser automatiquement ledit premier indice (36) d'information pouvant être lu par une

machine dans ladite image électronique ;
décoder automatiquement ledit premier indice (36) d'information pouvant être lu par une machine de façon à fournir lesdites données d'identification du paquet ;
localiser automatiquement ledit second indice (38) d'information alphanumérique dans ladite image électronique ;
décoder automatiquement ledit second indice (38) d'information alphanumérique pour fournir lesdites données de destination du paquet ; et
combiner lesdites données d'identification du paquet et lesdites données de destination du paquet pour former un document d'enregistrement unifié du paquet; et
imprimer un troisième indice d'information sur ladite étiquette, ledit troisième indice d'information pouvant être lu par une machine et comprenant ledit document d'enregistrement unifié du paquet.

10. Système selon la revendication 9, caractérisé en outre par le fait qu'il comprend :

un poste de travail (30) d'affichage d'image pour afficher au moins une partie de ladite image électronique et pour recevoir des données entrées manuellement correspondant à ladite donnée de destination du paquet ; et
ledit système (14) de décodage d'étiquette étant en outre programmé pour :
déterminer si lesdites données de destination du paquet sont valables ;
si lesdites données de destination du paquet ne sont pas valables, afficher au moins une partie de ladite image électronique sur ledit poste de travail (30) ; et
recevoir des données de destination du paquet entrées manuellement, et dans lequel ledit document d'enregistrement unifié du paquet comprend lesdites données d'identification du paquet et lesdites données de destination du paquet entrées manuellement.

11. Système selon la revendication 9, caractérisé en outre en ce que ledit premier indice d'information pouvant être lu par une machine comprend un code barre et lesdites données d'identification du paquet comprennent un nombre d'identification du paquet.

12. Système selon la revendication 9 ou la revendication 10, caractérisé en outre par le fait que ledit système (14) de décodage d'étiquette est en outre programmé pour stocker ledit document d'enregistrement unifié du paquet dans une base de données.

13. Système selon la revendication 9 ou la revendication 10, caractérisé en outre par le fait que ledit second indice (38) d'information alphanumérique est localisé en :

identifiant une marque (42) indiquant l'emplacement dudit second indice (38) d'information alphanumérique ; et
utilisant ladite marque (42) pour localiser ledit second indice (38) d'information alphanumérique.

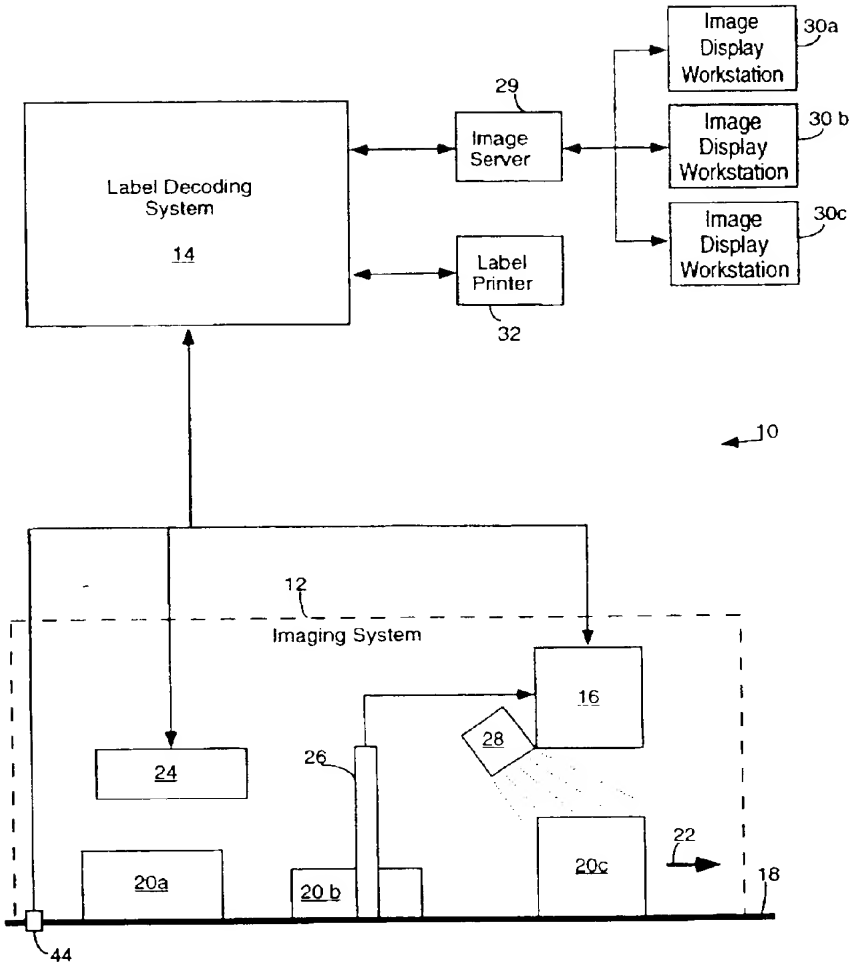
Image Display Workstation
30a
29
Image Server
Image Display Workstation
30 b
Label Decoding System
14
Image Display Workstation
30c
Label Printer
32
10
12
Imaging System
16
28
24
26
22
20a
20 b
20c
18
44

Fig. 1

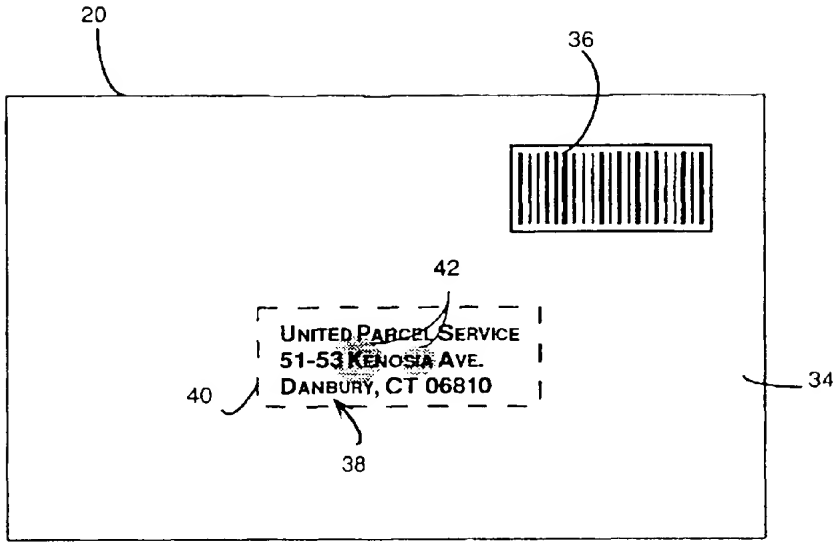
20
36
42
UNITED PARCEL SERVICE
51-53 KENOSIA AVE.
DANBURY, CT 06810
40
34
38

FIG. 2

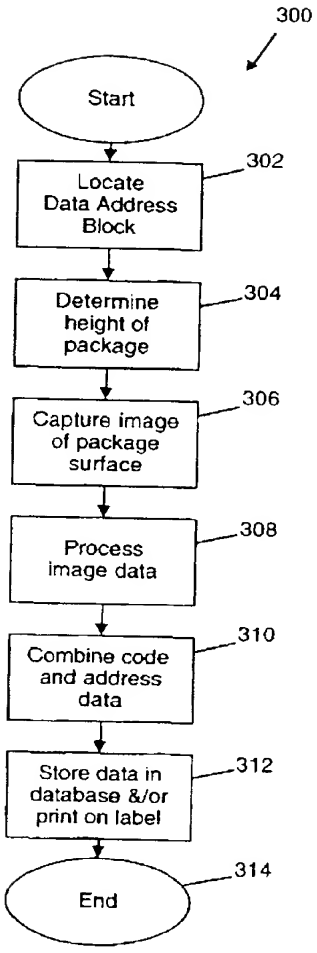

Fig. 3

Main Flow

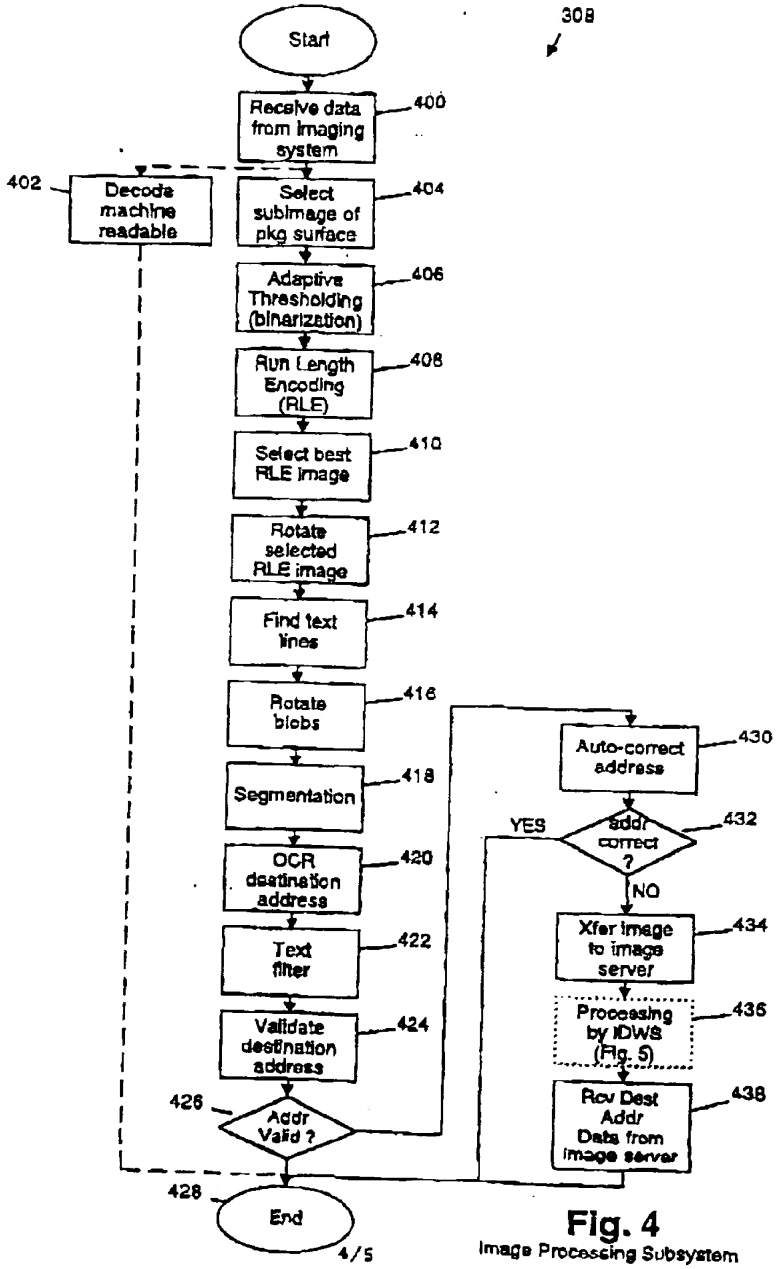

Fig. 4
Image Processing Subsystem

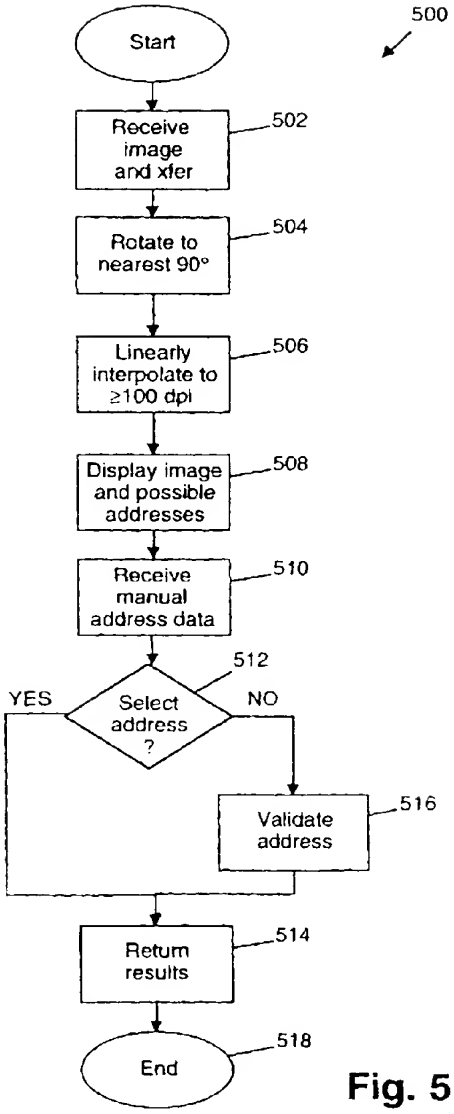
500
Start
Receive image and xfer
502
Rotate to nearest 90°
504
Linearly interpolate to ≥100 dpi
506
Display image and possible addresses
508
Receive manual address data
510
Select address ?
512
YES
NO
Validate address
516
Return results
514
End
518

Fig. 5